

Refrigeration Case

4' 180° LED

Under Shelf

4.8 Watt



BENEFITS

- Magnet mounted for quick installation!
- Milky lens for NO glare, NO hot spots
- Ultra-slim profile
- CRI Greater than > 94
- Premium visual merchandising
- IP67 rated (damp and wet locations)
- High luminance and low power consumption
- 180 Degree Beam Angle
- No UV, No RF interference
- No Mercury, RoHS compliant

LED Greenlight 4.8 Watt Under Shelf Lamp

SKU options:

- GL-180-4F-4.8W-94-3000K-IP67
- GL-180-4F-4.8W-94-3500K-IP67
- GL-180-4F-4.8W-94-4000K-IP67



ledgreenlightint.com

Products are warranted only to meet LED Greenlight International's production data sheet specifications. Products and specifications are subject to change without notice.



rev 10-20-2015

SPECIFICATIONS


average wattage	4.8 watts
luminous efficacy	104 lm/w (milky lens)
input voltage	95 -305 VAC
color temp (ANSI)	3000K, 3500K, 4000K
CRI (color rendering index)	94
R9	>75
system input current	24 Volt DC Constant Voltage
output	503 lumens (milky lens)
beam angle	180 degrees
dimensions	1168mm x 22mm x13mm
life span	> 100,000 hours
operating temperature (driver)	-22F +86F (-30C +30C)
ratings	IP67
warranty	7 years non-prorated
certification	c CSA us, UL1598, UL 8750, NSF DLC (pending)
driver	Custom UL Class 2
power factor	1.00
total harmonic distortion	10%
off-state power	0 watts



4115 Challenger Way, Caldwell, ID 83605

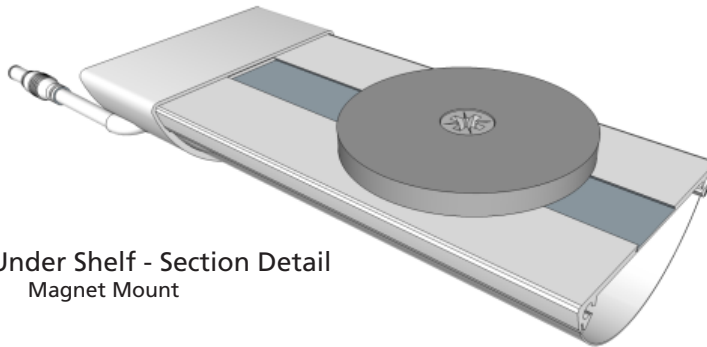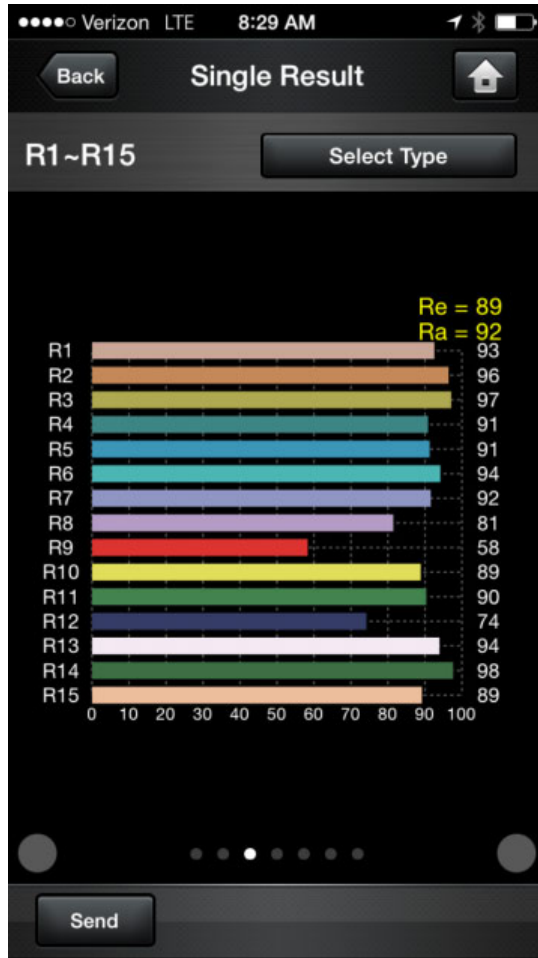

4.8 Watt Under Shelf - Section Detail
Magnet Mount



4.8 Watt Under Shelf - Section Detail
Lamp-to-Lamp Daisy Chain Interconnect

ledgreenlightint.com

Products are warranted only to meet LED Greenlight International's production data sheet specifications. Products and specifications are subject to change without notice.

rev 10-20-2015



4115 Challenger Way, Caldwell, ID 83605