

Refrigeration Case 4' 180° LED Under Shelf Lamp 9 Watt



BENEFITS

Magnet mounted for quick installation!

Milky lens for NO glare, NO hot spots

Ultra-slim profile

CRI Greater than > 94

Premium visual merchandising

IP67 rated (damp and wet locations)

High luminance and low power consumption

180 Degree Beam Angle

No UV, No RF interference

No Mercury, RoHS compliant

LED Greenlight 9 Watt Under Shelf Lamp

SKU options:

GL-180-4F-9W-94-3000K-IP67

GL-180-4F-9W-94-3500K-IP67

GL-180-4F-9W-94-4000K-IP69



ledgreenlightint.com

Products are warranted only to meet LED Greenlight International's production data sheet specifications. Products and specifications are subject to change without notice.


rev 8-3-2015

SPECIFICATIONS


average wattage	9 watts
luminous efficacy	104 lm/W (milky lens)
input voltage	95 -305 VAC
color temp (ANSI)	3000K, 3500K, 4000K
CRI (color rendering index)	94
R9	>75
system input current	24 Volt DC Constant Voltage
output	936(milky lens)
beam angle	180 degrees
dimensions	1168mm x 22mm
life span	> 100,000 hours
operating temperature (driver)	-22F +86F (-30C +30C)
ratings	IP67
warranty	7 years non-prorated
certification	c CSA us, UL1598, UL 8750, DLC (pending)
driver	Custom UL Class 2
power factor	1.00
total harmonic distortion	10%
off-state power	0 watts

 ledgreenlight®

4115 Challenger Way, Caldwell, ID 83605

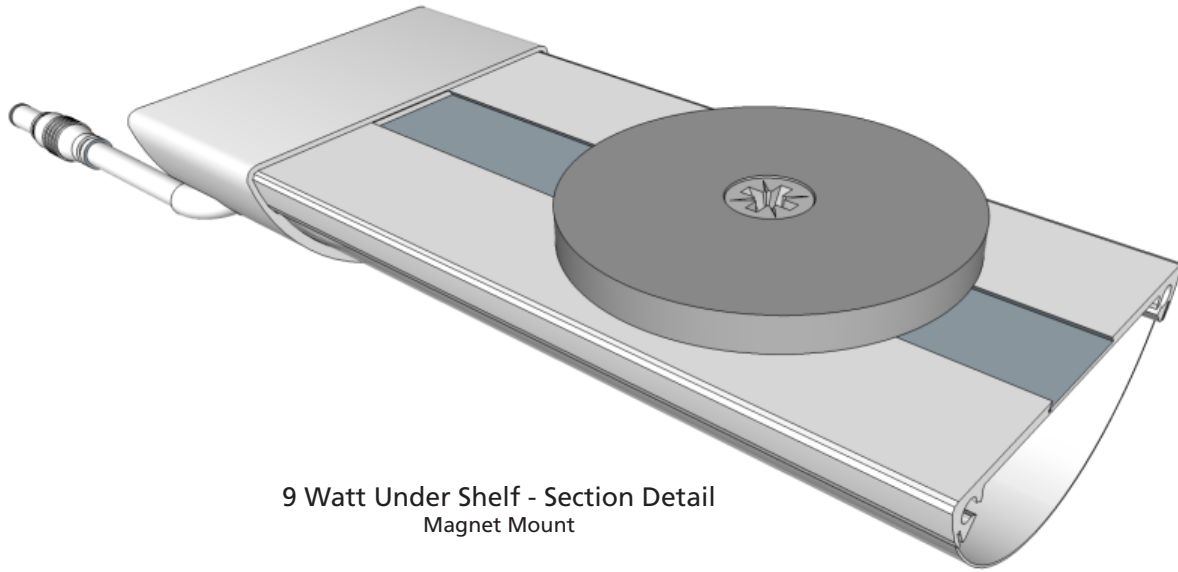

9 Watt Under Shelf - Section Detail
Magnet Mount

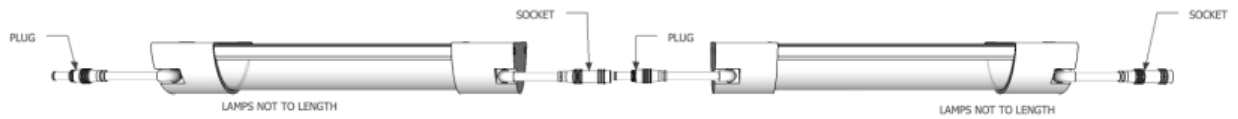

9 Watt Under Shelf - Section Detail
Lamp-to-Lamp Daisy Chain Interconnect